

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Jialin SHEN

Filed: May 30, 2001

Attorney Docket No.: 3926.029

Box: **PATENT APPLICATION**  
Honorab!e Commissioner of  
Patents and Trademarks  
Washington, D.C. 20231

I am a citizen of the United States residing at 3940  
Venetian Way, Tampa, Florida;

The attached English-language document is a full, true and faithful translation made by me of the text of the attached German-language document identified with Attorney reference Dr. Sr 112 104.


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may

Patent Application  
Verification Statement

Attorney Docket: 3926.029

jeopardize the validity of this application and of any patent  
issuing thereon.

Date: 5-30-01

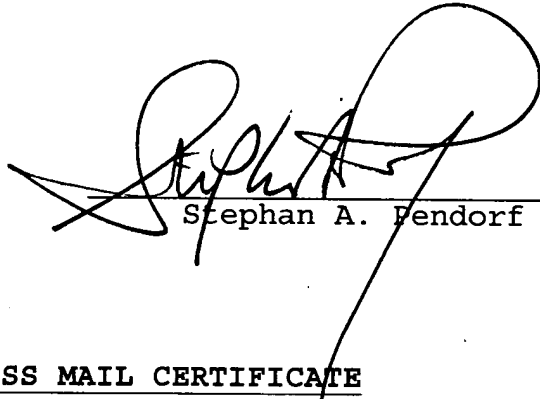

Stephan A. Pendorf

EXPRESS MAIL CERTIFICATE

"EXPRESS MAIL" MAILING LABEL NUMBER: EL568147192US

DATE OF DEPOSIT: May 30, 2001

I HEREBY CERTIFY that the foregoing VERIFICATION STATEMENT and a stamped receipt post card are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. §1.10 on the date indicated and is addressed: ATTN: Box PATENT APPLICATION, Commissioner of Pat nts and Trademarks, Washington, D.C. 20231.

The Commissioner is hereby authorized to charge any additional fees which may be required at any time during the prosecution of this application without specific authorization, or credit any overpayment, to Deposit Account Number 16-0877.



Bonnie L. Horst

125  
A<sub>1</sub> MATERIAL SYSTEM FOR USE IN THREE DIMENSIONAL PRINTING

125  
A<sub>2</sub> > [0001] The invention concerns a material system for use in 3D-printing, according to the precharacterizing portion of Patent Claim 1. A material system of this general type is already known from WO 98/09798.

[0002] In manufacturing technology and in particular in industrial model construction new types of more rapid production methods are constantly being developed. One group of this type of rapid manufacturing processes is referred to as rapid-prototyping-processes. This group includes the three dimensional or 3D-printing.

09870288  
FOESD 98202860  
[0003] 3D-printing, according to WO 98/09798, is a process in which a powder type material system, comprised of filler material and binder, are bonded to each other in successive layers. For this the powder is applied in successive layers and the powder layer is "printed" with a solvent, which activates the binder and therewith adheres the filler material. Thereby there results a cross-sectional view of a construction component. As soon as this is finished, a new powder layer is applied and is newly "printed". This process is repeated so long until an entire construction component has been completed.

[0004] The construction component produced by this type of process possesses a low form stability, so that they are liable to breakage or distortion during the subsequent handling of the construction component. A further consequence of this type of low form stability is that larger construction components under certain conditions cannot be constructed as a single piece, even if, in the future, machines with large construction spaces are made available. Larger construction components would break as a result of their low form stability and due to the load of their

own weight. This applies in particular for materials with high density. But even for small parts with high quality requirements, in particular with fine or filigreed structures, the shape stability must be increased.

INS  
A3

[0005] The task of the present invention is comprised of providing a material system for use in a 3D-printing, which exhibits a higher form stability and strength.

---

0507005 : 053001  
TOOESD

[0006] The invention, with respect to the material system to be produced, is set forth in the characteristics of Patent Claim 1. The further claims contain advantageous embodiments and further developments of the inventive material system (Patent Claims 2 through 12).

---

INS  
A4

[0007] The task, with respect to the material system to be produced for use in a 3D-printing is inventively solved thereby, that the material system

contains binder and solvents as well as optional filler materials,

wherein the binder is soluble in the solvent,  
as well as

two complementary polyelectrolytes  
and/or

an initiator for initiating a crosslinking reaction in the binder.

[0008] The advantage of such a mixed material system is comprised in the high binding force between the individual particles. This high binding force results either from the acid-base bonds, which form between the complementary electrolytes, or from the supplemental crosslinking initiated by the initiator, or from both. Suitable initiators include for example, known photoinitiators or also thermoinitiators, for example peroxide.

Higher binder forces between the individual particles means, at the same time, a higher form rigidity or strength of the 3D-printing product. This makes possible the production of larger, thinner-walled and more filigreed components, which result in higher precision and thus less post-working requirement and also less defects, as well as employability in a broader material spectrum.

[0009] In one advantageous embodiment of the inventive material system the two complementary polyelectrolytes are contained in two binders or in a binder and a solvent. The respective acid-base reaction is first initiated upon contact between the binder and solvent. Thereby, the individual components of the material systems are easy to store and work with.

[00010] In a further advantageous embodiment of the inventive material system the initiator is contained in the solvent or in the binder or binders. This guarantees a good and targeted distribution within the material system and at the same time a simple activation of the photoinitiator. The activation can occur by short duration illumination of respectively one material layer during the 3D-printing process.

[00011] In another advantageous embodiment of the inventive material system the filler material is coated with a binder. Processes for a coating of this kind are known to those working in this art. With binder-coated filling materials there comes the possibility of a more even distribution of the binder than by a simple mixing of these two components, and therewith an improved form stability over the entire construction component.

[00012] Preferably a first filler material is coated with an acidic polyelectrolyte and a second filler material (same or different



[00015] Also advantageous is a material system which flows in an autoclave, in particular in an autoclave as conventionally employed in fine casting technology.

[00016] A further method for removing of the original model out of the fine cast mold comprises introducing both into an autoclave and to apply increased pressure ( $> 5$  bar) and temperature ( $> 150^{\circ}\text{C}$ ). Suitable materials, for example wax or low molecular weight polymers, are flowable under these conditions. That means, the original shape is fluidized and can flow out of the ceramic mold. Included therein is a necessary supplemental firing, in order to remove residual materials out of the narrow cavities.

[00017] Also advantageous is a material system, in which at least a substantial part of the filler material and binder is in the form of rounded-off particles.

[00018] This makes it possible to completely or almost completely dispense with wetting agents, and thus reduces the amount of wetting agent content. Beyond this, it improves the surface quality of the construction component and reduces the necessary coating thickness. Research has shown that the construction component precision increases and the post-casting or follow-up work requirement is reduced.

[00019] Particularly advantageous is one such material system, in which the average or mean particle diameter is smaller than approximately  $40\text{ }\mu\text{m}$ . In a material system, in which the particle diameter is smaller than approximately  $30\text{ }\mu\text{m}$ , construction components with a surface granularity or roughness of  $R_a \leq 6\text{ }\mu\text{m}$  can be produced.

[00020] Also advantageous is a material system in which the filler material is comprised of wax, PS, PMMA or POM. These materials exhibit a sufficiently high strength or rigidity for a 3D-printing product, are almost residual-ash-free and exhibit at the same time a good suitability for the "flash fire" and/or autoclave process. PMMA-powder exhibits, beyond this, depending upon the manufacturing process via polymerization, almost ideal round particles.

[00021] Also advantageous is a material system in which the binder is comprised of a water-soluble polymer, preferably of polyvinyl pyrrolidone (PVP). This could be a homo- and/or co-polymer or even a blend. Particularly suitable are two complementary polyelectrolytes, for example basic and acidic PVP. A water-soluble binder is to be preferred for environmental considerations and with respect to the health endangerment potential for the operating personnel compared to binders which require other solvents. PVP is water soluble and almost residual ash free.

[00022] Also advantageous is a material system (with high binder force and rounded off particles), in which the proportion of binder in the material system is less than approximately 10 weight percent. Thereby a sufficient binding is guaranteed and at the same time, with the reduction in binder component, the swelling behavior of the material system is lowered. This again minimizes the manufacturing defects in the construction geometry and improves the structural stability.

[00023] Also advantageous is an inventive material system with increased binder force, in which the filler material is comprised of metal, ceramic or carbide. Conventionally employed binders are not capable of binding these types of materials with high density, in order to compensate for loads on the basis of their



own weight, and are thus not capable of providing sufficient structural stability. The present materials however exhibit a high stability and rigidity and produce together with the new binder a 3D-printing product (for example metal-matrix-composite), which unlocks completely new fields of application, for example for injection molded tools or electrodes.

[00024] In the following the inventive material system will be described in greater detail on the basis of the illustrative examples:

[00025] The material system contains a PMMA-copolymer-powder as filler. The powder comprises particles with an average diameter of approximately 35  $\mu\text{m}$  as well as having a rounded-off spherical shape. Added to the PMMA-powder is a wetting agent in the amount of 0.05 weight percent in the form of inorganic Zn- or Al-syrate, which represents the major portion of the residual ash content.

[00026] The material system contains, besides this, two binders in the form of an acidic and a basic PVP-polyelectrolyte. A portion of the PMMA-powder is coated with the acidic binder, the other portion with the basic. The coated PMMA powders are mixed with each other in equal measure. PVP is almost residual-ash-free and water-soluble. The filler material PMMA is chemically compatible with the PVP binder.

[00027] The material system employs water as solvent. Water is harmless, environmentally friendly and economical.

[00028] The material system has a residual ash content of less than 0.05%.

[00029] During the 3D-printing process the two binders are activated by the water solvent and form stable acid-base-complexes, via which the individual particles are bonded to each other.

[00030] The inventive material system in the embodiment of the above described example demonstrates itself to be particularly suitable for application in precision casting technology, since it has a good shape stability as well as a low residual ash content and, on the basis of the fine particle size and almost round particles, makes possible products with a good surface quality.

[00031] Further, the filler material and the two binders exhibit a good chemical compatibility, the filler material exhibits a high stability and rigidity, and the two complementary binders exhibit a very high binding force, whereby this material system qualifies as particularly suitable for original models.

[00032] Molding original models additionally require a sufficiently high temperature resistance.

[00033] Although the invention has been described in detail with reference to a described embodiment, it is not to be considered limited thereby, but rather can be broadly applied and above all in the areas of rapid prototyping.